

VISIFLEX STRIP DOORS

There's a solution to suit every opening... how can we help?



For control of:

- Dust
- Temperature
- Noise
- Vermin

Ideal for:

- Clean rooms
- Fume bays
- Loading docks
- Freezers
- Coolrooms
- Laboratories
- Sound enclosures
- Welding bays
- Proving rooms



No opening is too small or too large.

Visit our website www.dmf.com.au



Since 1967, DMF International has been creating only the best door systems for all Australian and overseas markets. The Visiflex Strip door continues this great tradition.


VISIFLEX STRIP DOORS

Technical information to help you evaluate your selection

The Head Rail Fixing

Our exclusively developed head rails are robust extruded aluminium section, in a clear anodised finish for corrosion protection. The unique design has an efficient "T" slot, allowing for a variety of selected overlaps, and permitting individual strips to be stretched laterally during fixing.

The Head Rails come in three different sectional sizes, all of which can be either head fixed or face fixed.

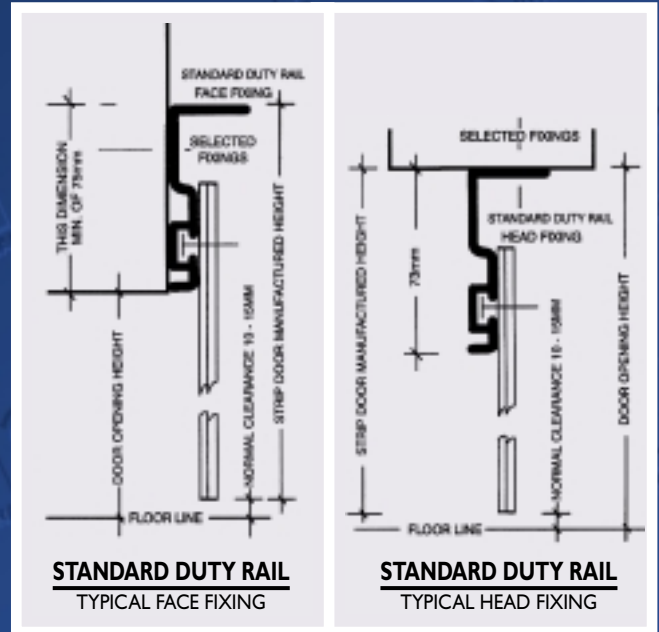

PVC Strip Selection

The width, thickness and overlap of the PVC strip, is determined by the application, doorway size, traffic type and draught. We have PVC grades that suit from -40°C up to 50°C, and various colours, including Weldscreen.

Our experienced advisers can quickly recommend the correct selection for your application.

Important Design Requirement

To enhance the life of any strip door, it is strongly recommended that the height of the opening is approximately 20% higher than the size of equipment passing through the opening.



Ask about our stock Modular Strip Doors, suitable for pedestrian openings



Head Office and Manufacturing Plant
3/88 Magowar Road, Girraween NSW 2145 Australia
Tel. +61 2 9636 5466 Fax. +61 2 9688 1531
Agents in all Australian States, New Zealand, Singapore, Philippines,
Malaysia, Hong Kong, Indonesia, Sth Korea, China and India.

Your local distributor: